

GM1700

BARONNESS

Quality on Demand

GM Series

GM1700

1.5m mid-mount Rotary Mower
Rough/Semi-rough/Slopes



BARONESS GM1700


Superb mowing on sloping areas

Extremely stable thanks to a low centre of gravity and four square axles


Light weight (868 to 895kg) combined with high output




Available with "Flexdeck-", Rear- Mulch- or Side-discharge cutting decks

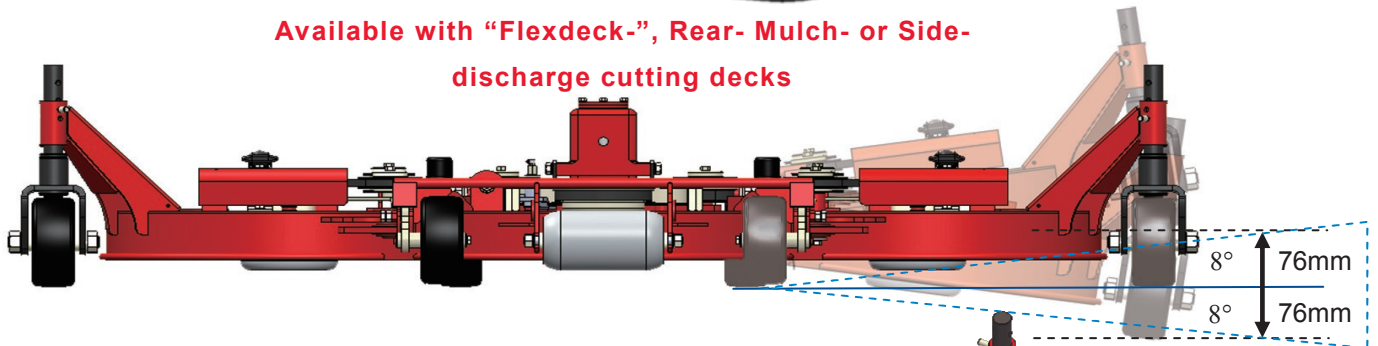

The contour "Flex-deck" prevents scalping and uneven cutting

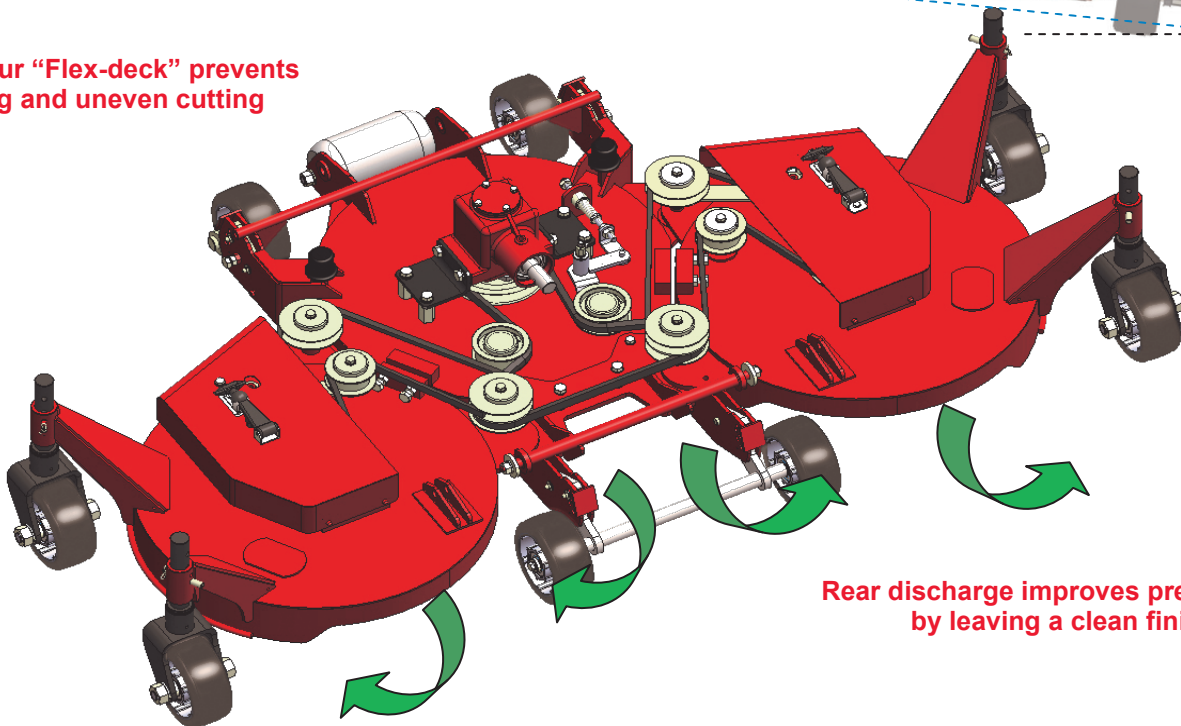

Rear discharge improves presentation by leaving a clean finish

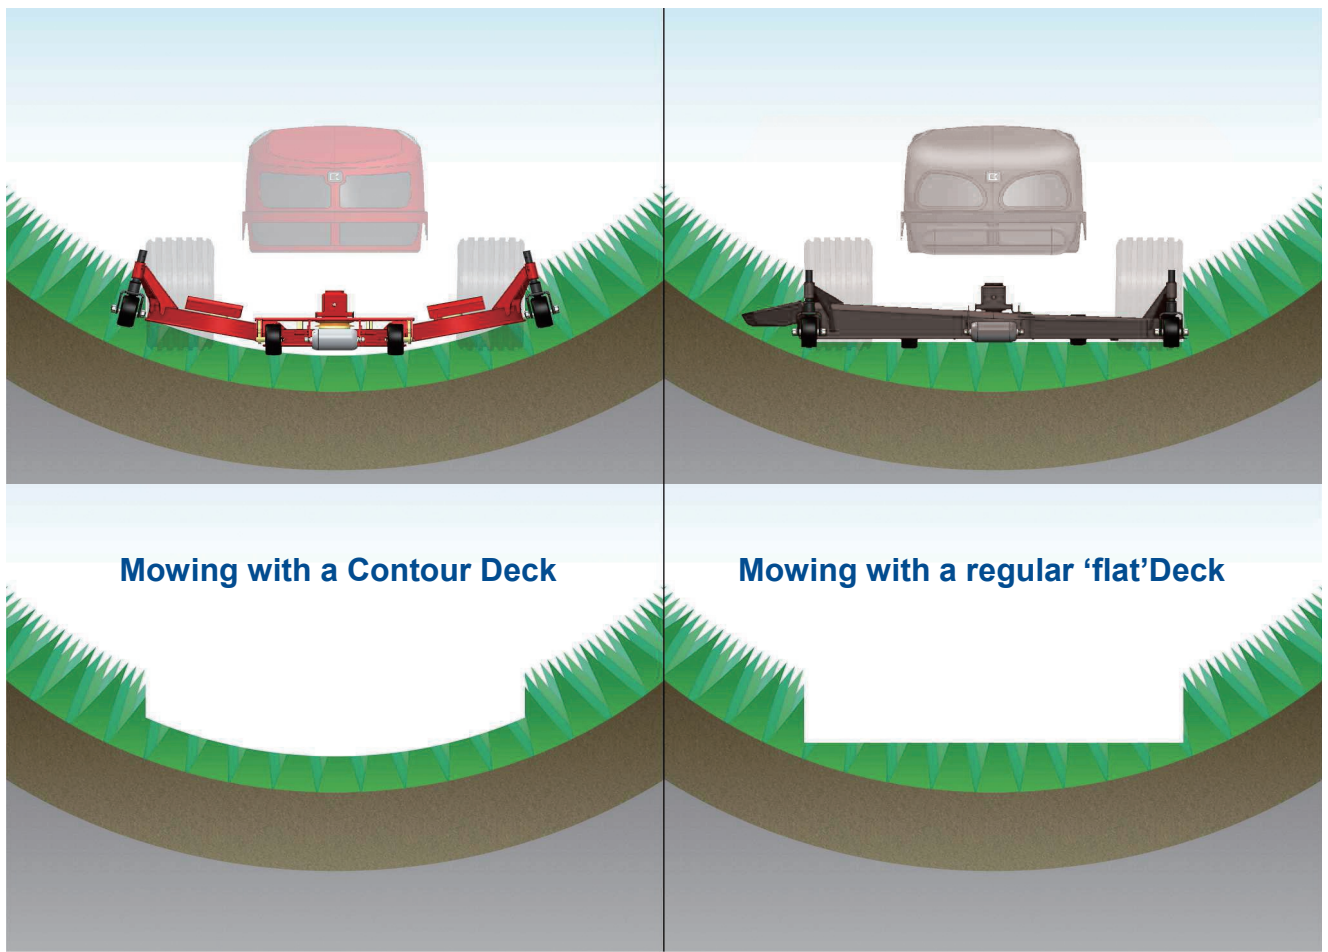

Mow safely on slopes with Baroness



30 degree tilting seat fitted as standard



Integral tilt meter fitted as standard


Unrivalled access and serviceability with Baroness




**Kubota D-1105
17.8kW (23hp)
Diesel engine
standard**

**Easy access for
cleaning**

**Bonnet quickly
removable for
servicing**

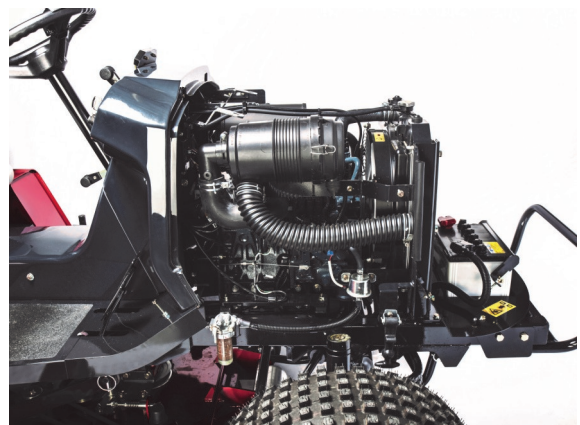

Baroness	GM1700 Specifications
Engine	Kubota D1105 Diesel Displacement 1123cc Power 17,8kW (24,2PS) at 2800 rpm
Transmission	Hydraulic, variable displacement swash plate pump and wheel motors, 2 - or 4 - wheel drive
Mower drive	Power take-off shaft
Speed—Mow/Transport	Forwards: 0 to 16 km/h (Two wheel drive) 0 to 8 km/h (Four wheel drive) Reverse: 0 to 7 km/h
Dimensions	255cm x 167cm x 121/190cm to steering wheel/rollbar
Mowing width	151cm
Mowing height	35mm to 110mm
Tyres	Front/Rear 21 x 11.00-10
Wheelbase	150cm
Wheel track	150cm
Rollbar	Standard
Weight	868kg - 895kg (incl. Rollbar)



Distribution Europe
Kyoisha U.K. Ltd.
Unit 5 Hatch Industrial Park, Greywell Road, Basingstoke, Hampshire, RG24 7NG
Tel: +44 (0)1256 461591
e-mail: sales@baronessuk.com

www.baronessuk.com